



---


## Suspension hooks self locking

### Short Description

---

- Choice of 3 adjustable height suspension hooks for use with 1.5mm or 2mm thick wire rope.
- Suspension hooks are self locking. For adjustment press the button at the cable entry point.

## Product Images

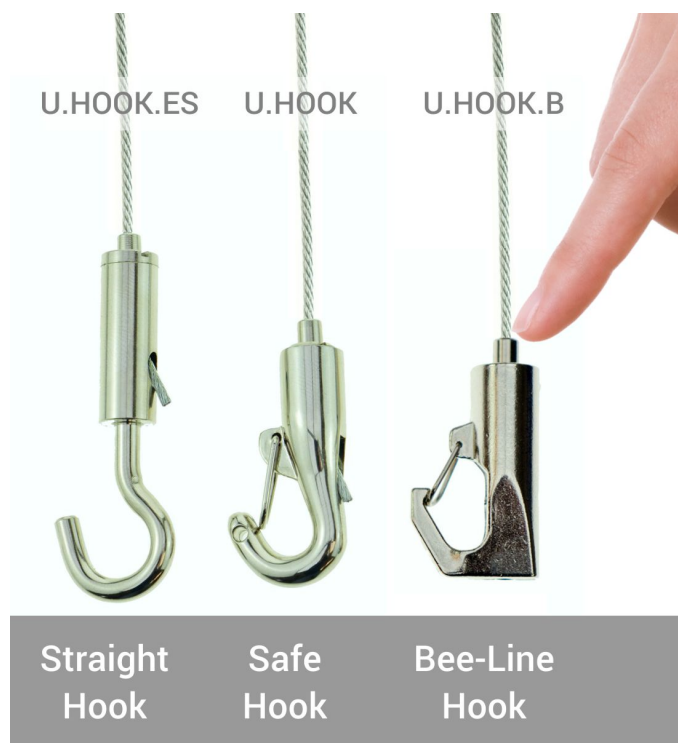

## Description

### Suspension hooks are easily adjustable

Suspension hooks with self-locking facility are ideal for rapid installation and levelling up on site.

Slide the hook up a support wire (usually 1.5mm dia, but also works with 2mm wire). The suspension hook locks fast wherever it is placed. To lower simply depress the quick release button as shown on the image. The clutch

<https://www.sign-holders.co.uk/hanging-wire-systems/acoustics-and-services/suspension-hooks-self-locking.html>

html

13/05/2025

mechanism is released until the suspended item is at exactly the right height. Excess wire can then be snipped off.

It is much easier to level up acoustic panels, light fittings and ceiling hung building services when the adjustment can be performed at the suspension point rather than at the ceiling.

- **Straight hook** is suitable for hanging vertical baffles such as a panel with a suspension hole
- **Safe Hook** has a spring catch across the mouth of the hook to prevent accidental detachment.
- **Bee-line Hook** also has a safety catch and is suitable for heavier loads than the safe hook (up to 15kg SWL)

More Information


Need complete kits?  
Not the exact fitting you require?  
See OUR FULL RANGE OF WIRE SUSPENSION KITS

More Details about these suspension hooks


Excess wire should be trimmed with good quality sharp wire cutters to prevent fraying. The wire should only be trimmed once the height of the suspended item has been checked and finalised.  
Safe Hook has a safe working load of 6kg  
Bee-Line Hook and Enlarged Straight Hook (ES.HOOK) have a safe working load of 15kg  
These load ratings include a 5:1 margin of safety and apply when used with a 7x7 construction wire rope with a 1.5mm diameter.

Product Dimensions


Safe Hook



Straight Hook



Bee-Line Hook



Delivery and Returns

- We offer a choice of delivery options tailored to the goods selected and your location, calculated for you automatically in the Checkout. When feasible, you will be offered options for Free, Economy or Next Day delivery.
- Any product returned by the purchaser must be unused and in its original packaging, which should be unmarked. If goods are received damaged or faulty we will take care of the problem.
- For detailed information about Delivery charges or Returns and refund policies, please click on the links below.

Include in Google Feed

Yes

Postable

No

Small parcel

No

Oversize

No

