




Ceiling fixings with wire ropes

Short Description

- Ceiling anchors with drop wires
- 1.5mm wire ropes with up to 15kg suspended loads
- Roof hanging wires 1 or 2 metre lengths
- Huge stocks of all fittings

Product Images



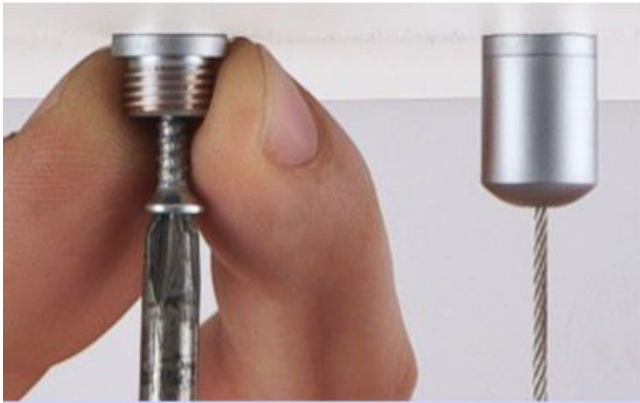

**SCREW CEILING
ANCHOR**

U.SCA.1/T



**DOME SLOTTED
ANCHOR**

U.DOME.1/T



**TWIST CEILING
ANCHOR**

U.TCA.1/T



**LOOP END CABLE
(Lasso)**

CABLE.2/L

Screw Ceiling Anchor

Dome Slotted Anchor

Twist Ceiling Anchor

Loop End Cable



Description

Wire rope cable anchor fixings - Ceiling or beam

TOP Anchor FIXINGS are supplied complete with galvanised wire ropes (1.5mm diam in either 1m or 2m lengths). These ceiling fixings are normally combined with a [bottom end fitting](#) to provide height adjustment.

Screw Ceiling Anchor (U.SCA.1/T or U.SCA.2/T)

Screw-on ceiling anchor supplied with 1m or 2m wire rope. Satin finish fitting, suitable for plasterboard and

wooden ceilings.

Dome Slotted Anchor (U.DOME.2/T)

Chrome finish dome screw-on anchor has a cable slot to allow attachment to sloping ceilings or vertical surfaces, including. 2m wire rope.

Twist Ceiling Anchor (U.TCA.1/T or U.TCA.2/T)

The ceiling grid anchor twists on to lock securely, providing reliable fixing for a suspended ceiling with a 1m/2m long wire. White/satin finish.

Loop End Cable (CABLE.2/L or CABLE.3/L)

Easily create a lasso to suspend from a roof girder, purlin or trunking using 2m/3m wire rope with a pre-formed crimped loop at one end.

More Information

Screw Size: 4mm x 40mm (Imperial no. 8 x 1 1/2 inch)

These hanging hardware components provide a secure TOP FIXING to a ceiling or roof space, providing a plain end hanging wire. These top fixings do not provide any height adjustment facility. (Other [ceiling anchor fittings](#) incorporating a clutch mechanism for height adjustment at the ceiling are available).

To complete the set, a bottom fitting (such as a hook) is required. A choice of suitable [bottom components](#) is available here: [BOTTOM FITTINGS](#).

Loadings

The safe working load depends on what the top fitting is anchored to - i.e. on the load-carrying ability of the top fixing. The wire rope will safely carry a load of 15kg. Still, it is likely that the ceiling fixing may only be suitable for a lesser loading - especially suspended ceilings and plasterboard unless specialist proprietary plasterboard screws and plugs are used in place of the 'basic' plugs supplied with these components.

Dimensions

The screw ceiling anchor is a petite matte silver fitting with a diameter of just 12mm.

Dome slotted anchor has a 16mm diameter and a shiny chrome finish.

Twist ceiling anchor fits onto ceilings with a standard 25mm wide ceiling grid.

<div data-bbox="97 819 344 851" data-label="Section-Header"> <h3>Product Dimensions</h3> </div>	<div data-bbox="780 129 1023 210" data-label="Section-Header"> <h4>Screw Ceiling Anchor</h4> </div> <div data-bbox="932 275 1240 546" data-label="Image"> <p>A technical drawing of a screw ceiling anchor. It is a cylindrical component with a slightly wider top flange. A vertical dimension line on the left indicates a height of 17 mm. A horizontal dimension line at the top indicates a width of 12 mm. A small screw is shown inserted into the bottom center of the anchor.</p> </div> <div data-bbox="766 846 1003 927" data-label="Section-Header"> <h4>Dome Ceiling Anchor</h4> </div> <div data-bbox="825 913 1457 1538" data-label="Image"> <p>A technical drawing of a dome ceiling anchor. It consists of a dome-shaped top and a vertical stem. The left view shows the dome with a vertical dimension line indicating a height of 21 mm and a horizontal dimension line at the top indicating a width of 16 mm. The right view shows the side profile of the dome and the stem.</p> </div>
<div data-bbox="97 1744 352 1776" data-label="Section-Header"> <h3>Delivery and Returns</h3> </div>	<ul style="list-style-type: none"> • We offer a choice of delivery options tailored to the goods selected and your location, calculated for you automatically in the Checkout. When feasible, you will be offered options for Free, Economy or Next Day delivery. • Any product returned by the purchaser must be unused and in its original packaging, which should be unmarked. If goods are received damaged or faulty we will take care of the problem. • For detailed information about Delivery charges or Returns and refund policies, please click on the links below.
<div data-bbox="97 1957 375 1989" data-label="Text"> <p>Include in Google Feed</p> </div>	<div data-bbox="756 1957 799 1989" data-label="Text"> <p>Yes</p> </div>
<div data-bbox="97 2027 201 2058" data-label="Text"> <p>Postable</p> </div>	<div data-bbox="756 2027 793 2058" data-label="Text"> <p>No</p> </div>

Small parcel	No
Oversize	No

